

PECAT[®] Garden Entry Elbow

AG Series

APPLICATION

Provides a high strength transition fitting for connecting polyethylene gas pipes to above ground installations via a steel 90° elbow and through wall pipe to a below ground PE connection. Typically used for elevated gardens with PE services laid up to the property.

DESCRIPTION

Comprising a PECAT® mechanical joint, factory assembled with straight length of PE pipe with a GRP protective cover sleeve, a through wall steel outlet with tight fit PE cover terminating with a PE pipe.



- PECAT parts (1): Steel
- Inlet & Outlet pipes (2 & 3): PE to GIS/PL2-2
- Outlet pipe cover (5): PE
- Inlet Cover tube(4): GRP
- Wall Seal & Tube support (6 & 7): EPDM Rubber
- Corrosion protection: Zinc plate & Epoxy/Polyester coating.

INSTALLATION

Garden Entry Elbows are suitable for site jointing by electro fusion only. Adjustment to entry height can be made by cutting PE & GRP tubes on site, no adjustment to through wall length is possible. Please refer to the PE fitting manufacturer's instructions for details on electro fusion welding procedures.

SPECIFICATION

Meets GIS/PL3:2014 requirements. Maximum Operating Pressure (MOP) = 5.5 Bar.



Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication & reserves the right to change without notice.



TECHNICAL HELPLINE: +44 (0) 1462 443226 e: sales@wask-uk.com w: www.wask-uk.com

PECAT® GARDEN ENTRY ELBOW


INLET X OUTLET SIZES

63mm SDR11 x 63mm SDR11 only.

DIMENSIONS

Note: consult the factory for lengths not shown in table below.

SIZE = INLET × OUTLET SIZE			
SIZE	เา	L2	Ø CORE HOLE (MIN)
63 x 63	1000	500	95
63 x 63	1000	750	95
63 x 63	1000	1000	95

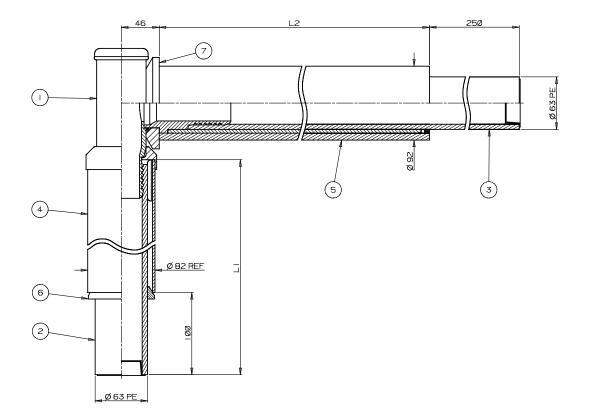



To visit our Video Library go to: www.youtube.com/user/CraneBSU



46-48 WILBURY WAY, HITCHIN, HERTFORDSHIRE, SG4 0UD

TELEPHONE: +44 (0)1462 443225 TELEPHONE: +44 (0)1462 443226 FAX: +44 (0)1462 443311 EMAIL: sales@wask-uk.com

www.wask-uk.com



• Designed and manufactured under quality management systems in accordance with BS EN ISO 9001.

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice. W_PGEE_0121_v1